

START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840

0030329



Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2025LM, 21W, 101lm/W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, 50,000 hrs (L70), (HxW) 60x205mm, 5 step MacAdam ellipse, Class 2, 220-240V, energy class: A++, A+, A



PRODUCT OVERVIEW

IPC Code	0030329
Product name	START Downlight 205 IP44 2025lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Certifications	EUNEW008
ETIM Class	EC001744
Fixture luminous flux (lm)	2025
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303291
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840

0030329

General data

IPC Code	0030329
Product name	START Downlight 205 IP44 2025lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C - 40°C
Operating temperature rated (°C)	40
Certifications	EUNEW008
ETIM Class	EC001744

Optical data

Fixture luminous flux (lm)	2025
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric, Direct
Glare control	< 25
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	21
Mains voltage (V)	220-240V~
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	600
Inrush Current (A)	6.44
Inrush Duration (µs)	830
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	12
Max. Luminaires per 13A C Breaker	15
Max. Luminaires per 16A C Breaker	19
Max. Luminaires per 20A C Breaker	25

Lifetime data

Lumen maintenance - L70 B50	50000
Average life (Nominal) (h)	50000

START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840
0030329



Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Length (mm)	220
Nominal Product Width (mm)	220
Nominal Product Height (mm)	60
Nominal Product Diameter (mm)	220
Weight (kg)	0.468
Recessed Depth (mm)	150

Packaging

Single packaging type	Carton
Product EAN number	5410288303291
Packaging single length / height (cm)	22.8
Packaging single width (cm)	22.8
Packaging single depth (cm)	7.0
DUN14 (outer)	15410288303298
Units per outer package	14
Packaging outer length / height (cm)	51.0
Packaging outer width (cm)	47.5
Packaging outer depth (cm)	25.0


PHOTOMETRY

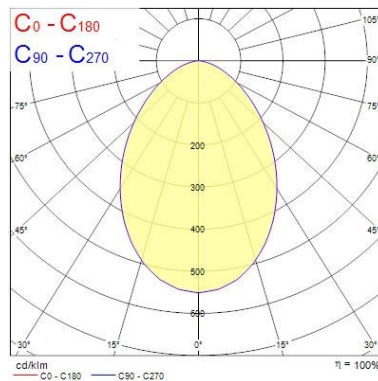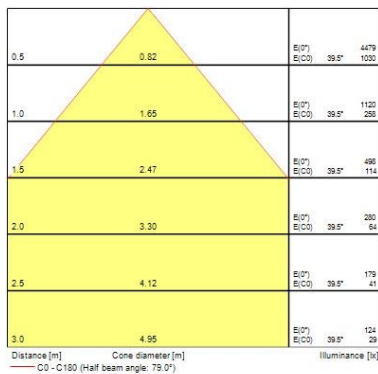


TECHNICAL DRAWINGS


START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840
0030329




SYLVANIA 0030329

 This luminaire contains built-in LED lamps

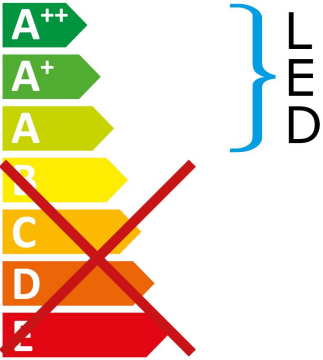


The lamps cannot be changed in the luminaire.

874/2012 


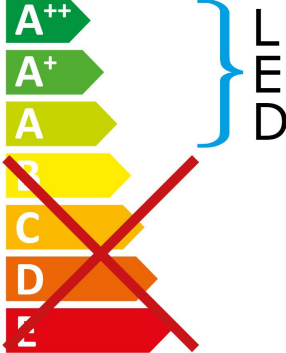
START DOWNLIGHT IP44 205

START Downlight 205 IP44 2025lm 840
0030329



This luminaire contains built-in LED lamps

The lamps cannot be changed in the luminaire.



SYLVANIA 0030329 874/2012